




Gate Valve

GALA | Regulating Systems

Resilient Seated OS&Y Type-Groove-Groove Ends

Fig. 333GG-300
333GG-250
333GG-200

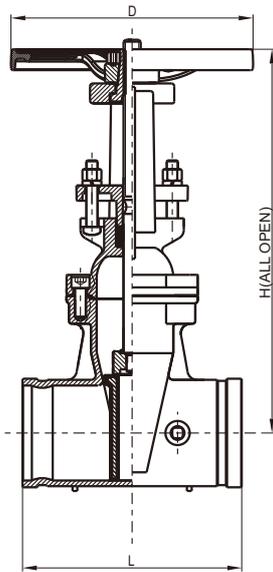

Valve Standard

Conforms to AWWA C515 / BS5163

Working pressure

200PSI / 250PSI / 300PSI



Connection Ends

AWWA C 606
VDS2100/AS2638.2



Materials List

| Part Name | Material | Specification |
|-----------|--------------------------|---------------|
| Body | Ductile Iron | A536 65-45-12 |
| Wedge | Ductile Iron EPDM Coated | |
| Wedge Nut | Stainless Steel | AISI304 |
| Stem | Stainless Steel | AISI 304/420 |
| Bonnet | Ductile Iron | A536 65-45-12 |
| Gasket | EPDM | Commercial |
| Packing | Graphite | Non-asbestos |
| Stem Nut | Bronze | ASTM B62 |
| Handwheel | Ductile Iron | A536 65-45-12 |

Dimensions(mm/inch):

| SIZE | mm | 50 | 65 | 80 | 100 | 125 | 150 | 200 | 250 | 300 |
|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | inch | 2 | 2 1/2 | 3 | 4 | 5 | 6 | 8 | 10 | 12 |
| L | mm | 178.0 | 191.0 | 203.0 | 229.0 | 254.0 | 267.0 | 292.0 | 330.0 | 356.0 |
| | inch | 7.00 | 7.50 | 8.00 | 9.00 | 10.00 | 10.50 | 11.50 | 13.00 | 14.00 |
| H | mm | 411 | 411 | 462 | 514 | 629 | 709 | 922 | 1116 | 1300 |
| | inch | 16.18 | 16.18 | 18.19 | 20.24 | 24.76 | 27.91 | 36.30 | 43.94 | 51.18 |
| D | mm | 183 | 183 | 253 | 253 | 306 | 306 | 355 | 445 | 445 |
| | inch | 7.20 | 7.20 | 9.96 | 9.96 | 12.05 | 12.05 | 13.98 | 17.52 | 17.52 |

Top Techno Fire & Safety Co. LLC

