



# Swing Check Valve

**GALA** | *Regulating Systems*

**Resilient Seated Grooved Ends**

Fig. 50GG-365  
50GG-300  
50GG-250  
50GG-200



## Features

- Can be installed horizontally or vertically (with upward flow)
- Convenient to install and maintain
- Low pressure drop


## Working pressure

200PSI / 250PSI / 300PSI / 365PSI



## Connection Ends

AWWA C 606  
VDS2100/AS2638.2

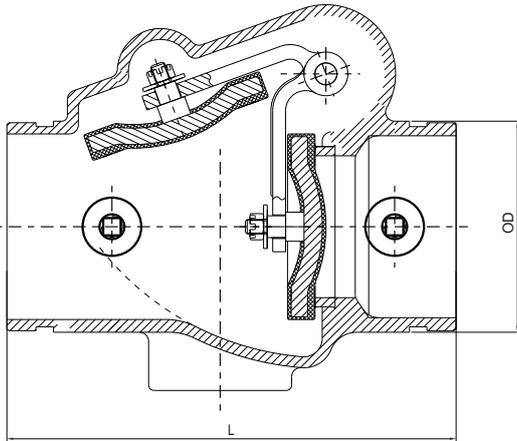

## Materials List

Part Name	Material	Specification
Body	Ductile Iron	ASTM A536 65-45-12
Seat	Bronze	ASTM B62 C83600
Clapper	Q235+SS304+EPDM	
Clapper Arm	Stainless Steel	ASTM A351 CF8
Washer	Stainless Steel	AISI 304
Hexagonal Slot Thin Nut	Stainless Steel	AISI 304
Split Pin	Stainless Steel	AISI 304

## Dimensions(mm/inch)

SIZE	mm	50	65	80	100	125	150	200	250	300
	inch	2	2½	3	4	5	6	8	10	12
<b>L</b>	mm	169	203	213	245	267	292	356	432	495
<b>OD</b>	mm	60.3	73.0/76.1	88.9	114.3	139.7/141.3	165.1/168.3	219.1	273	323.85

**Top Techno Fire & Safety Co. LLC**

