



# TECHNO



BY-B2408U-G/R

# EMERGENCY EXIT SIGN




BY-B2408U-G

BY-B2408U-R

### Features

- ▶ Super bright & Long Lasting LEDs
- ▶ Universal AC input voltage from 120-347VAC
- ▶ Single or double face with changeable legends
- ▶ 3 Hour Emergency Duration
- ▶ You may rotate the Acrylic panel in any angle from 0 degree to 180 degree

### Product Size

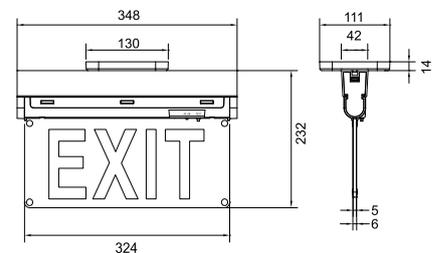

Unit:mm

### Light Distribution Curve



### Product parameters

Model Name	BY-B2408U-R	BY-B2408U-G
Input Voltage	AC120-347V, 50/60Hz, 30mA	AC120-347V, 50/60Hz, 30mA
Light Source	SMD4014(16pcs)	SMD4014(16pcs)
Input Power	3.5W	3.5W
Emergency Power	1.5W	1.5W
Operation Mode	Maintained	Maintained
Emergency Duration	180 Minutes	180 Minutes
Emergency Luminance Flux	/	/
Recharge Time	24 Hrs	24 Hrs
Battery	Ni-Cd 3.6V, 900mAh	Ni-Cd 3.6V, 900mAh
Battery Life	Up to 4 years	Up to 4 years
Use Environment	Damp Locations	Damp Locations
Operation Temp Range	0 °C -40 °C	0 °C -40 °C
Remote Capable	/	/
Max. mounting height	/	/

Top Techno Fire & Safety Co. LLC



BY-B2408U-G/R