



BK102 CONVENTIONAL MANUAL CALL POINT



BK102 Conventional resettable call point is designed for manual notification of fire or emergency in conventional fire system. It can be activated by pressing the resettable glass in front of it. It is suitable for indoor use with its robust and stylish design. There is an animated notification led and when the button is active, this led stays on constantly. After pressing the glass, it can be reset with special key. When the button is pressed and activated, it transmits the fire information to the control panel over the communication line.

Features


- Robust and aesthetic PC/ABS case
- Led indicator
- Resettable with special key
- EN54-11 Certified

Certificates:



TECHNICAL SPECIFICATIONS

OPERATING VOLTAGE	16 to 30 VDC
MAXIMUM ALARM CURRENT	<7 mA @ 24 VDC (included Led blink)
ENVIRONMENTAL SPECIFICATIONS	
HUMIDITY	10% to 93% (Relative Humidity, Non-condensing)
OPERATING TEMPERATURE	-10°C to 50°C
PHYSICAL SPECIFICATIONS	
CASE MATERIAL	PC/ABS Case
DIMENSIONS (H x W x D)	90 x 90 x 27 mm
WEIGHT	160 grams

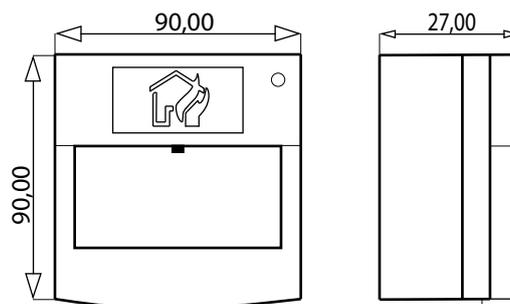

Top Techno Fire & Safety Co. LLC

