



# EIME UL BULKHEAD EMERGENCY LIGHT



**EM-601L**



**EM-604L**



**EM-632L**

### Features:

- UL/cULs Listed UL 924
- Universal wall or ceiling mounting
- Longlife, high brightness
- Energy saving, reliable and safety
- Easy installation and maintenance
- 24hours charging time
- Battery Overcharge&discharge protection
- Charing LED indicator and test button

### Application:

- Working Temperature: -5C~45C
- Working Humidity: <90%
- Used in Commerical/Residential areas


EM-601L



EM-604L



EM-632L

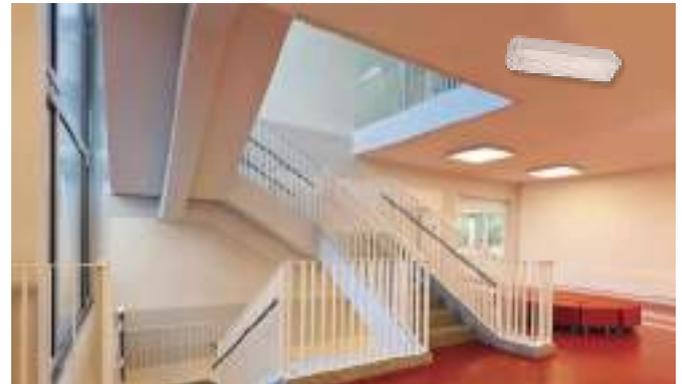

Item No.	In put Voltage	Light Source	AC Power	Battery	Emergency Duration	Material	Lumen	Type
EM-601L	AC120V/277V 50/60Hz	SMD5050 /20pcs	7W	Ni-Cd 3.6V/4500MAH	3Hours	Fire retardant ABS base+PC Cover	180LM	Non-Maintain
EM-604L	AC100V-240V 50/60Hz	SMD2835 /20pcs	3W	NI-CD SC 3.6V/2000MAH	3 Hours	Fire retardant ABS housing+PC Cover	204LM	Non-Maintain
EM-632L	AC220V-240V 50/60Hz	SMD 2835 LED 20PCS	2.5W	NI-CD SC 3.6V/2000MAH	3 Hours	Fire retardant ABS housing+PC Cover	> 200LM	Non-Maintain

**Top Techno Fire & Safety Co. LLC**

