



**EIME**

# UL RECESSED EMERGENCY LIGHT

**EM-605L**

**EM-603L**




**Features:**

- UL/CULs Listed UL 924
- Universal wall or ceiling mounting
- Longlife, high brightness
- Energy saving, reliable and safety
- Easy installation and maintenance
- 24hours charging time
- Battery Overcharge&discharge protection
- Charing LED indicator and test button

**Application:**

- Working Temperature: -5C~45C
- Working Humidity: <90%
- Used in Commerical/Residential areas

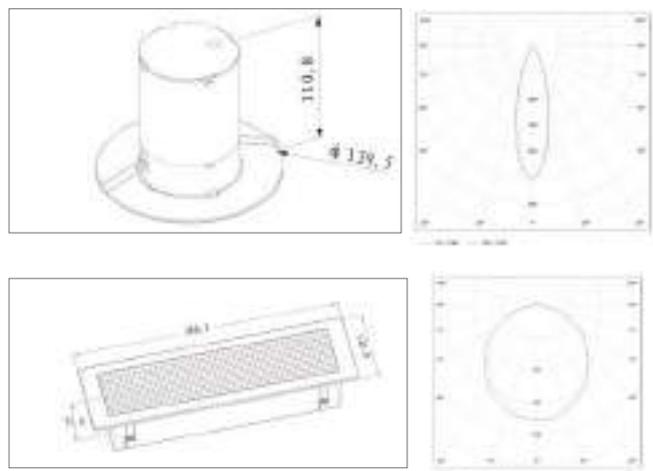

Item No.	In put Voltage	Light Source	AC Power	Battery	Emergency Duration	Material	Lumen	Type
EM-605L	100-240VAC 50/60HZ	SMD5050 4W/1pcs	3W	Ni-MH SC4.8V /2200MAH	3 Hours	Fire retardant ABS base+PC Cover	250LM	Non-Maintain
EM-603L	120/277VAC 50/60HZ	SMD2835 /20pcs	3W	Ni-MH SC4.8V /2200MAH	3 Hours	Fire retardant ABS base+PC Cover	250LM	Non-Maintain

**Top Techno Fire & Safety Co. LLC**

