




EiME UL BULKHEAD EMERGENCY LIGHT



EM-632ML



EM-604ML

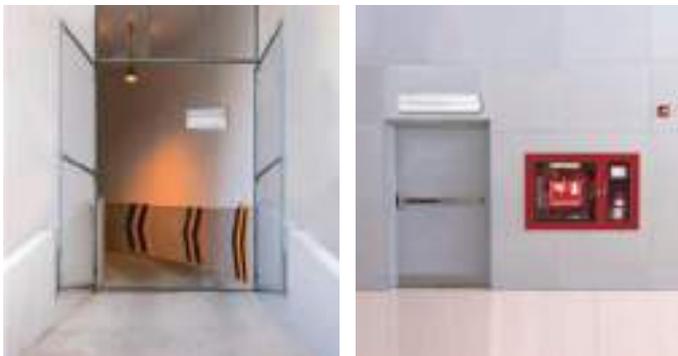



Features:

- UL/cULs Listed UL924
- UL 5VA flame rating
- TYPE: MAINTAIN
- Addressable luminaires
- RS485 bus communication
- Long life LED Lighting
- Universal wall or ceiling mounting
- Energy saving, reliable and safety
- 24 hours charging time
- Battery over charge & discharge protection
- Charging LED indicator and test button

Application:

- Working Temperature : -5 C ~45 C
- Working Humidity: <90%
- Used in commercial/Residential areas

Below Optional Pictograms all include (EM-632ML) (EM-604ML)

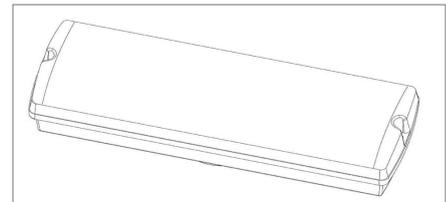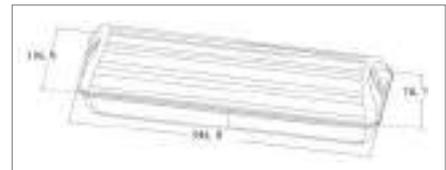

IP65

cUL[®] US LISTED



Item No.	In put Voltage	Light Source	AC Power	Battery	Emergency Duration	Material	Lumen	Type
EM-632ML	100-240VAC 50/60HZ	SMD2835 /20pcs	5.5W	NI-CD SC 3.6V/2000MAH	3 Hours	Fire retardant ABS housing	270LM	Maintain
EM-604ML	100-240VAC 50/60HZ	SMD2835 /20pcs	5.5W	NI-CD SC 3.6V/2000MAH	3 Hours	Fire retardant ABS housing	204LM	Maintain

Top Techno Fire & Safety Co. LLC

