



# EIME UL RECESSED EMERGENCY LIGHT

NEW

NEW



EM-660L




EM-660L

### Features:

- UL/cULs Listed UL 924
- Universal wall or ceiling mounting
- Longlife, high brightness
- Energy saving, reliable and safety
- Easy installation and maintenance
- 24hours charging time
- Battery Overcharge&discharge protection
- Charing LED indicator and test button

### Application:

- Working Temperature: -5 C~45 C
- Working Humidity: <90%
- Used in Commerical/Residential areas

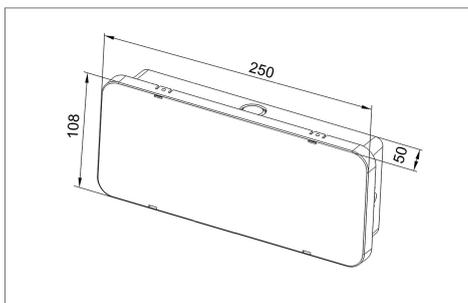

Item No.	In put Voltage	Light Source	AC Power	Battery	Emergency Duration	Material	Lumen	Type
EM-660L	220-240VAC	SMD3030 8PCS	3.5W	LiFePO <sub>4</sub> 26650 3.2V/3400mAH	>3H	Fire retardant ABS base+PC Cover	250LM	Maintain

Top Techno Fire & Safety Co. LLC

