



EIME UL EXIT SIGN

NEW



EM-660ML

NEW



EM-661ML



Features:

- UL/cULs Listed UL 924
- Single or double face configuration
- Longlife LED lighting
- Wall, side or ceiling mounting
- Removeable directional arrow inserts
- 24hours charging time
- Battery Overcharge&discharge protection
- Charging LED indicator and test button

Application:

- Working Temperature: -10°C~40°C
- Working Humidity: <90%
- Used in commercial/Residential areas

Below Optional
Pictograms all include

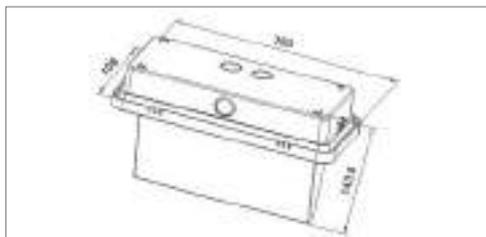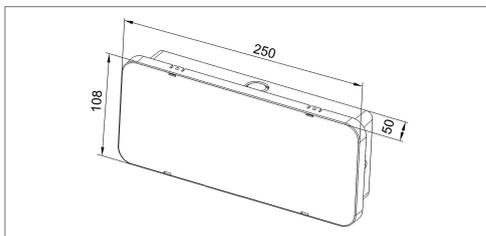

Item No.	In put Voltage	Light Source	AC Power	Battery	Emergency Duration	Material	/	Type
EM-660ML	120V/277V 50/60Hz	SMD3030 8PCS	3.5W	LiFePO ₄ 26650 3.2V/3400mAH	>3H	ABS+PC	/	Maintain
EM-661ML	120V/277V 50/60Hz	SMD3030 8PCS	3.5W	LiFePO ₄ 26650 3.2V/3400mAH	>3H	ABS+PC	/	Maintain

Top Techno Fire & Safety Co. LLC

