



EIME UL EXIT SIGN



EM-740-G/RSA



EM-740-G/RDA




Features:

- UL Listed UL 924
- EM-740-G/RSA Single face configuration
- EM-740-G/RDA Double face configuration
- Longlife LED lighting
- Universal wall, side or ceiling mounting
- Removeable arrows
- 24hours charging time
- Battery Overcharge&discharge protection
- Charging LED indicator and test button

Application:

- Working Temperature: -5°C~45°C
- Working Humidity: <90%
- Used in commercial/Residential areas

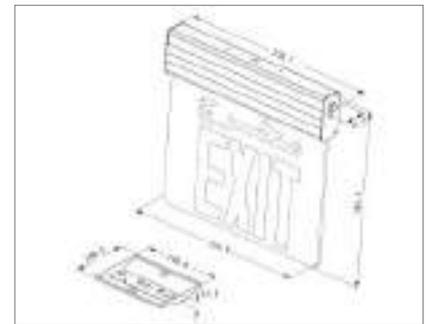

Item No.	Input Voltage	Light Source	AC Power	Battery	Emergency Duration	Material	/	Type
EM-740-G/RSA	AC120V/277V 50/60Hz	F5/12pcs	3W	NI-MH 4.8V /600MAH	3 Hours	Aluminum housing +Acrylic panel	/	Maintain
EM-740-G/RDA	AC120V/277V 50/60Hz	F5/12pcs	3W	NI-MH 4.8V /600MAH	3 Hours	Aluminum housing +Acrylic panel	/	Maintain

*G=Green
R=Red

Top Techno Fire & Safety Co. LLC

