



EiME UL EXIT SIGN



EM-740G/R




Features:

- UL Listed UL 924
- Single face configuration
- Longlife LED lighting
- universal wall, side or ceiling mounting
- Removeable arrows
- 24hours charging time
- Battery Overcharge&discharge protection
- Charing LED indicator and test button

Application:

- Working Temperature: -10 C~50 C
- Working Humidity: <90%
- Used in commerical/Residential areas

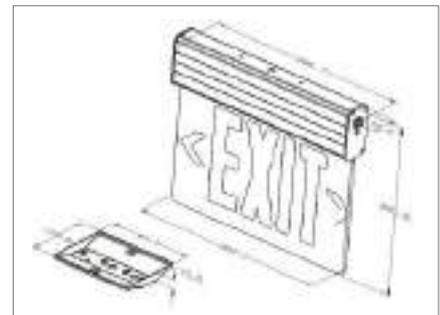

Item No.	In put Voltage	Light Source	AC Power	Battery	Emergency Duration	Material	/	Type
EM-740G/R	120/277VAC 50/60HZ	F5/12pcs	5W	Ni-Cd 4.8V/ 600mAH	3 Hours	Aluminum housing +acrylic panel	/	Maintain

*G=Green
R=Red

Top Techno Fire & Safety Co. LLC

