



# EIME UL EXIT SIGN



EM-750AR/G

EM-750G/R




#### Features:

- UL Listed UL 924
- Single/double face configuration
- Longlife LED lighting
- Universal wall, side or ceiling mounting
- Removeable arrows
- 24hours charging time
- Battery Overcharge&discharge protection
- Charging LED indicator and test button

#### Application:

- Working Temperature: -5°C~45°C
- Working Humidity: <90%
- Used in commercial/Residential areas

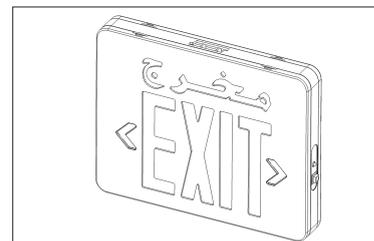

Item No.	In put Voltage	Light Source	AC Power	Battery	Emergency Duration	Material	/	Type
EM-750AR/G	100-240VAC 50/60HZ	F5/10pcs	2.5W	NI-MH 4.8V/ 600MAH	3 Hours	Fire retardant ABS housing	/	Maintain
EM-750G/R	120/277VAC 50/60HZ	F5/12pcs	8W	Ni-Cd 4.8V600mAh	3 Hours	Fire retardant ABS housing	/	Maintain

\*G=Green  
R=Red

**Top Techno Fire & Safety Co. LLC**

