



EIME UL EXIT SIGN

EM-751G

EM-752G



EM-753



Features:


- UL/cULs Listed UL 924
- Single or double face configuration
- Longlife LED lighting
- Wall, side or ceiling mounting
- 24hours charging time
- Battery Overcharge&discharge protection
- Charging LED indicator and test button

Application:

- Working Temperature: -10°C~40°C
- Working Humidity: <90%
- Used in commercial/Residential areas



Model EM-753 including 4 pictograms

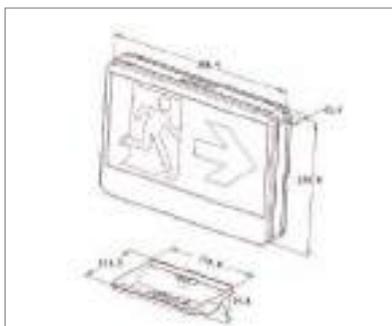

Item No.	In put Voltage	Light Source	AC Power	Battery	Emergency Duration	Material	/	Type
EM-751G	120/277VAC 50/60HZ	F5/12pcs	8W	Ni-Cd 4.8V/ 600mAH	3 Hours	Fire retardant ABS housing	/	Maintain
EM-752G	120/277VAC 50/60HZ	F5/12pcs	8W	Ni-Cd 4.8V/ 600mAH	3 Hours	Fire retardant ABS housing	/	Maintain
EM-753G	120/277VAC 50/60HZ	F5/12pcs	8W	Ni-Cd 4.8V/ 600mAH	3 Hours	Fire retardant ABS housing	/	Maintain

Top Techno Fire & Safety Co. LLC

