



EIME INTELLIGENT EMERGENCY LIGHT



EM-T603L



EM-T605L

Features:


- UL/cULs Listed UL 924
- Universal wall or ceiling mounting
- Longlife, high brightness
- Energy saving, reliable and safety
- Easy installation and maintenance
- 24hours charging time
- Battery Overcharge&discharge protection
- Charging LED indicator and test button

Application:


- Working Temperature: -5 C ~45 C
- Working Humidity: <90%
- Used in Commerical/Residential areas



EM-T603L

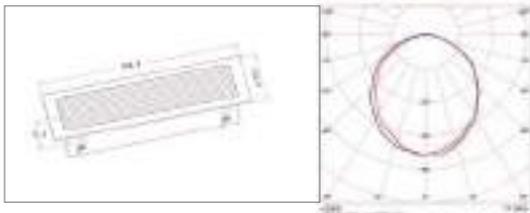

EM-T605L

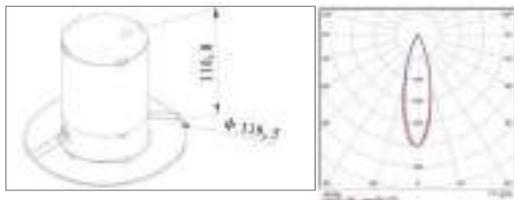

Item No.	Voltage	AC Power	Battery	Source	Emergency Duration	Communication bus	Lumen	brightness
EM-T603L	120/277VAC 50/60HZ	5.5W	NH-MH SC 4.8V/2200MAH	SMD2835/20PCS	>3 Hours	485 BUS	250LM	/
EM-T605L	100-240VAC 50/60HZ	3W	NH-MH SC 4.8V/2200MAH	SMD 3535/1PCS	>3 Hours	485 BUS	250LM	/

Top Techno Fire & Safety Co. LLC

