



EIME

INTELLIGENT WATER PROOF EMERGENCY LIGHT



EM-T604ML

NEW



EM-T660ML

NEW



EM-T661ML



Features:

- UL/cULs Listed UL924
- UL 5VA flame rating
- TYPE:MAINTAIN
- Addressable luminaires
- RS485 bus communication
- Long life LED Lighting
- Universal wall or ceiling mounting
- Energy saving, reliable and safety
- 24 hours charging time
- Battery over charge & discharge protection
- Charging LED indicator and test button

Application:



- Working Temperature : -5 C~45 C
- Working Humidity: <90%
- Used in commercial/Residential areas

Below Optional

Pictograms all include



IP65

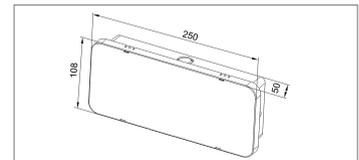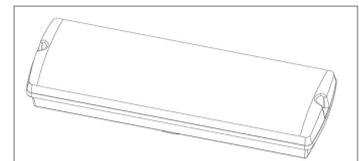

Item No.	Voltage	AC Power	Battery	Source	Emergency Duration	Communication bus	Lumen	brightness
EM-T604ML	100-240VAC 50/60HZ	7W	NI-MH SC 4.8V/2200MAH	SMD2835/20pcs	>3 Hours	RS485 BUS	240	/
EM-T660ML	100-240VAC 50/60HZ	7W	NI-MH SC 4.8V/2200MAH	SMD3030/8PCS	>3 Hours	RS485 BUS	/	/
EM-T661ML	100-240VAC 50/60HZ	7W	NI-MH SC 4.8V/2200MAH	SMD3030/8PCS	>3 Hours	RS485 BUS	/	/

Top Techno Fire & Safety Co. LLC

