



**TME**

# INTELLIGENT EMERGENCY LIGHT



**EM-T632L**



**EM-T604L**


### Features:

- UL/cULs Listed UL924
- UL 5VA flame rating
- Addressable luminaires
- RS485 bus communication
- Long life LED Lighting
- Universal wall or ceiling mounting
- Energy saving, reliable and safety
- 24 hours charging time
- Battery over charge & discharge protection
- Charging LED indicator and test button


### Application:

- Working Temperature : -5°C~45°C
- Working Humidity: <90%
- Used in commercial/Residential areas

EM-T632L

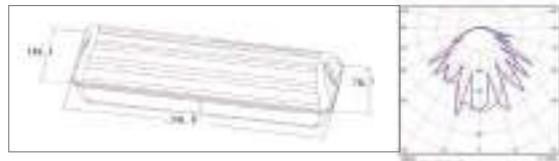

EM-T604L

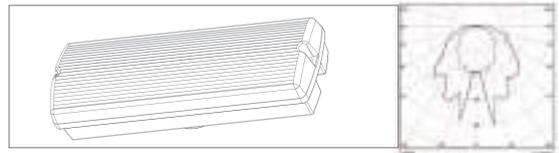

Item No.	Voltage	AC Power	Battery	Source	Emergency Duration	Communication bus	Lumen	brightness
EM-T632L	120/277VAC 50/60HZ	5.5W	Ni-MH SC 4.8V/2200MAH	SMD2835/20pcs	>3 Hours	485 BUS	250	/
EM-T604L	120/277VAC 50/60HZ	5.5W	Ni-MH SC 4.8V/2200MAH	SMD2835/20pcs	>3 Hours	485 BUS	240	/

**Top Techno Fire & Safety Co. LLC**

