



EIME INTELLIGENT EXIT SIGN



**EM-T705
(recessed type)**





**EM-T708
(ceiling recessed)**

Features:

- UL/cULs Listed UL924
- UL 5VA flame rating
- Addressable EXIT SIGN
- RS485 bus communication
- Single face configuration
- Long life LED Lighting
- Universal ceiling flush mounting
- Remove able arrows
- 24 hours charging time
- Battery over charge & discharge protection
- Charging LED indicator and test button

Application :

- Working Temperature : -5 C ~45 C
- Working Humidity: <90%
- Used in commercial/Residential areas

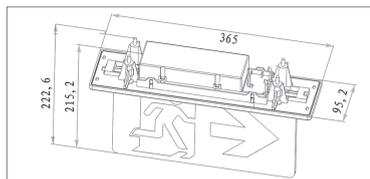

- 1: EM-T705 One product include below 4 pattern
- 2: EM-T708 price base on one graphics ,light graphics opinion



Item No.	Voltage	AC Power	Battery	Source	Emergency Duration	Communication bus	Lumen	brightness
EM-T705 (recessed type)	120/277VAC 50/60HZ	3.5W	NI-MH 4.8V/600MAH	SMD2835/14pcs	>3 Hours	485 BUS	/	>10cd/m ²
EM-T708 (ceiling recessed)	120/277VAC 50/60HZ	3.5W	NI-MH 4.8V/600MAH	SMD2835/14pcs	>3 Hours	485 BUS	/	>10cd/m ²

Top Techno Fire & Safety Co. LLC

