



EIME INTELLIGENT EXIT SIGN



EM-T741R/G




EM-T741

Features:

- UL/cULs Listed UL924
- Aluminum housing with high grade acrylic panel
- Addressable EXIT SIGN
- RS485 bus communication
- Single face configuration
- Long life LED Lighting
- Universal wall ,side or ceiling mounting
- Remove able arrows
- 24 hours charging time
- Battery over charge & discharge protection

Application :

- Working Temperature : -5 C~45 C
- Working Humidity: <90%
- Used in commercial/Residential areas

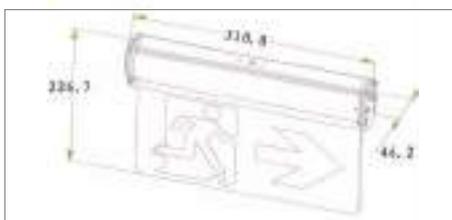

price base on one graphics ,light graphics opinion



Item No.	Voltage	AC Power	Battery	Source	Emergency Duration	Communication bus	Lumen	brightness
EM-T741R/G	120/277VAC 50/60HZ	3.5W	NI-MH 4.8V/600MAH	F5/8pcs	>3 Hours	485 BUS	/	>10cd/m ²
EM-T741	120/277VAC 50/60HZ	3.5W	NI-MH 4.8V/600MAH	SMD2835/14pcs	>3 Hours	485 BUS	/	>10cd/m ²

Top Techno Fire & Safety Co. LLC

