



EIME

INTELLIGENT EXIT SIGN



EM-T750AR/G



EM-T740R/G




Features:

- UL Listed UL 924
- Single/double face configuration
- Longlife LED lighting
- Universal wall, side or ceiling mounting
- Removeable arrows
- 24hours charging time
- Battery Overcharge&discharge protection
- Charging LED indicator and test button

Application:

- Working Temperature: -10 C ~ 50 C
- Working Humidity: <90%
- Used in commercial/Residential areas

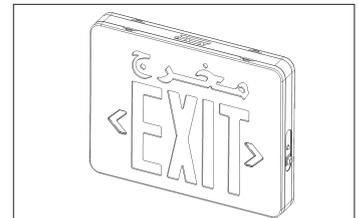

Item No.	Voltage	AC Power	Battery	Source	Emergency Duration	Communication bus	Lumen	brightness
EM-T750AR/G	100-240VAC 50/60HZ	2.5W	NH-MH 4.8V/600MAH	F5/10PCS	>3 Hours	485 BUS	/	>10cd/m ²
EM-T740R/G	120/277VAC 50/60HZ	3.5W	NH-MH 4.8V/600MAH	F5/12pcs	>3 Hours	485 BUS	/	>10cd/m ²

Top Techno Fire & Safety Co. LLC

