




FIRE HOSE REEL SWINGING & MANUAL TYPE

hlc

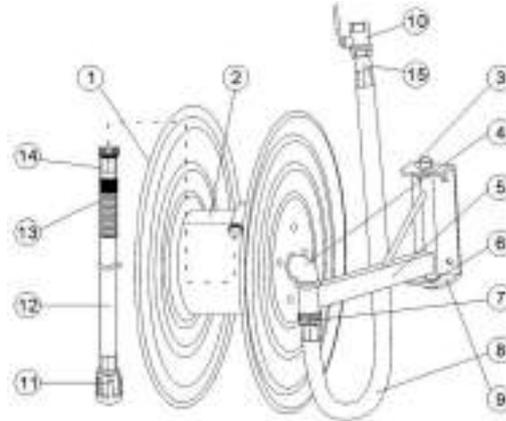

A Parts Name for hose reels

- ① hose reel disc ② roller ③ bracket ④ manual waterway ⑤ swinging arm
 ⑥ locking screw ⑦ inlet joint ⑧ connection hose ⑨ holder ⑩ valve
 ⑪ nozzle ⑫ fire hose ⑬ spring jacket ⑭ outlet joint ⑮ Connector

B Product Characteristics

- 1 This type is assembled in fire hose reel cabinet.
- 2 Full brass waterway which will never rot. We use nipples not hose clamps, to fill in the interface between hose and waterway. Once being screwed tightly, no leakage.
- 3 Hose reel with powder coated and anti-ultraviolet side discs. There can be pressure gauge at the reel axis.
- 4 High pressure resistance; Working at 30 kg pressure but not affected.
- 5 Endurance test on reel rotation; After over 3000 rotation, hose reels show no visible leakage; Our swinging hose reels shall be able to swing 1000 times to minimum 170° and also show no visible leakage or damage.
- 6 High pressure spray. The nozzle can be adjusted to jet/spray;
- 7 Our hose reels can be also used for cleaning when used for fire fighting.
- 8 Fire hose with anti-aging and anti-ultraviolet function. Maximum WP. is 12Bar. Average BP. can be up to 45Bar. Bp of 2W hose can be up to 60Bar.

C Product Specification & Installation Measurement

Model	Hose specification (mm)	Diameter (mm)	Bracket length (mm)	Reel width (mm)	Remarks
HLCR-08-A	19mm×25m/30m	555	300	150	/
HLCR-07-B	25mm×25m/30m	600/555	320	150/180	/

D Usage

- 1 Open the valve⑩, pull hose towards fire, open nozzle⑪ to spray/jet and aim at base of fire.
- 2 After use, close the valve⑩, drain water from hose, rewind the hose and close nozzle⑪.

Top Techno Fire & Safety Co. LLC

