



TECHNO



STEEL CASE BATTERY UNIT

BY-Z2136U-N&BY-Z2172U-N&BY-Z2250U-N






BY-Z2136U-N/BY-Z2172U-N/BY-Z2250U-N




Features

- ▶ Super bright&Long Lasting LEDs
- ▶ 120V/277V/347V AC input
- ▶ Test switch and AC-ON indicator included
- ▶ Overcharge&Over-discharge protection
- ▶ Combo Heads adjustable
- ▶ Temperature ratings are 10°C to 40°C (50°F to 104°F)
- ▶ Options available:
 - 36W(1pcs 6V 7.0Ah Lead Acid Battery)
 - 72W(1pcs 12V 7.0Ah Lead Acid Battery)
 - 150W(2pcs 6V 12Ah Lead Acid Battery)

Light Distribution Curve



Product Size

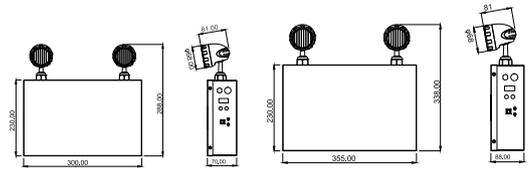

Unit:mm

Product parameters

| Model Name | BY-Z2136U-N | BY-Z2172U-N | BY-Z2250U-N |
|--------------------------|--|---|--|
| Input Voltage | AC120/277/347V, 50/60Hz, 100mA | AC120/277/347V, 50/60Hz, 160mA | AC120/277/347V, 50/60Hz, 200mA |
| Light Source | SMD 2835(6pcs) | SMD 2835(6pcs) | SMD 2835(6pcs) |
| Input Power | 9W | 15W | 21W |
| Emergency Power | 4W | 4W | 4W |
| Operation Mode | Non-Maintained | Non-Maintained | Non-Maintained |
| Emergency Duration | 120 Minutes | 120 Minutes | 120 Minutes |
| Emergency Luminance Flux | 260lm | 260lm | 260lm |
| Recharge Time | 24 Hrs | 24 Hrs | 24 Hrs |
| Battery | Lead Acid Battery 6V, 7Ah | Lead Acid Battery 12V, 7Ah | Lead Acid Battery 6V, 12Ahx2PCS |
| Battery Life | Up to 4 years | Up to 4 years | Up to 4 years |
| Use Environment | Do not use outdoors | Do not use outdoors | Do not use outdoors |
| Operation Temp Range | 0°C -40°C | 0°C -40°C | 0°C -40°C |
| Remote Capable | *6V, 10W(120Mins)/6V, 12W(90Mins)/6V, 36W(30Mins)* | *12V, 22W(120Mins)/12V, 27W(90Mins)/12V, 72W(30Mins)* | *12V, 45W(120Mins)/12V, 65W(90Mins)/12V, 150W(30Mins)* |
| Max. mounting height | 16.1ft (4.8 m) | 16.1ft (4.8 m) | 15.6ft (4.7 m) |

Top Techno Fire & Safety Co. LLC



BY-Z2136U-N&BY-Z2172U-N&BY-Z2250U-N